

APPLICATIONS

Hyundai Sonata 2006-2008

12.CAW1142-06

KIT FEATURES


- Double DIN Radio Provision
- Stacked ISO Mount Units Provision

KIT COMPONENTS

A) Double DIN Trim Plate B) Double DIN Brackets

A

B



TOOLS REQUIRED:

- Small Flat Blade Screwdriver • Panel Removal Tool
• Phillips Screwdriver



TABLE OF CONTENTS

Dash Disassembly

- Hyundai Sonata 2006- 2008	1
-----------------------------------	---

Kit Assembly

- Double DIN or Stacked ISO Mount Units Provision	2
---	---

<u>Final Assembly</u>	3
------------------------------------	---

***Note:**





Refer also to the instructions included with the aftermarket radio.

HYUNDAI SONATA 2006-2008

- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Open glove box and remove (2) Phillips screws from top edge of glove box opening and bottom edge of wood trim below radio. (Figure A)
- 3** Unclip and remove wood trim from below radio and above glove box. (Figure B)
- 4** Remove (1) Phillips screw securing each side panel next to radio then unclip and remove the panels. (Figure C)
- 5** Remove (6) Phillips screws securing the radio. Unplug and remove the radio. (Figure D)

NOTE: There is a factory support bracket in the bottom of the radio cavity that may need to be pushed out of the way for the aftermarket radio to fit properly.

Continue to kit assembly.

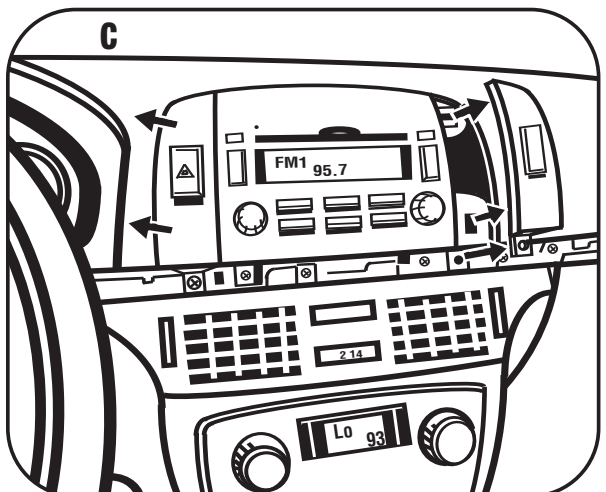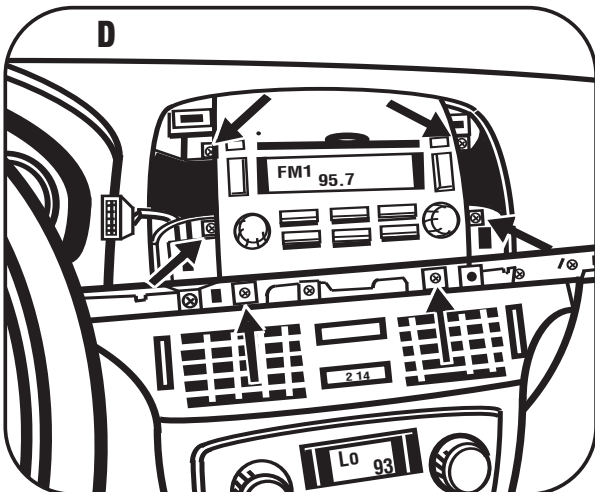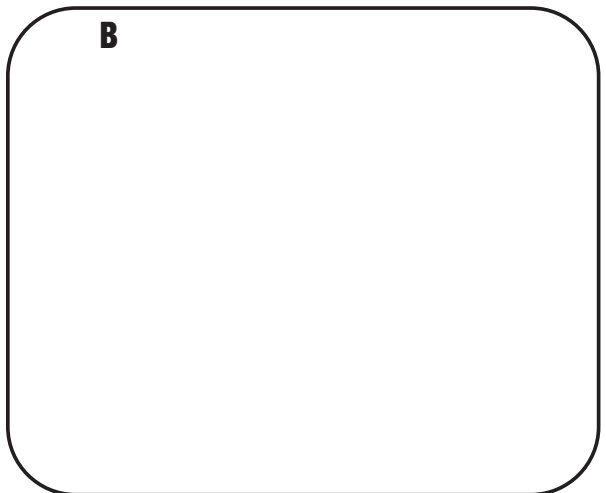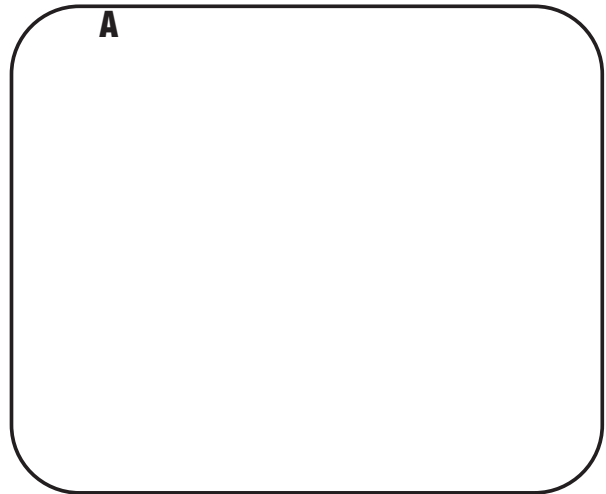


DOUBLE DIN OR STACKED ISO MOUNT UNITS PROVISION

****Note: Refer also to the instructions included with the aftermarket radio.***

- 1** Snap the Double DIN brackets to the inside edge of the Double DIN Trim Plate. (Figure A)
- 2** Slide the Double DIN or stacked ISO mount unit(s) into the bracket/trim plate assembly and secure the unit(s) to the assembly using the screws supplied with the unit(s). (Figure B)

Continue to final assembly.

A

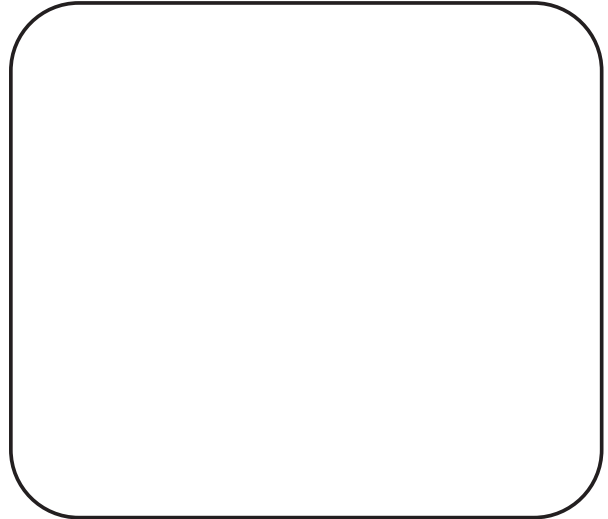

B

