

# KENWOOD





## Installation Manual Double DIN Kit

anthracite: CAW 2130-04

taupe: CAW 2130-05

**NOTE:** Secure the a/c vent, climate control, hazard switch, and the passenger air bag on/off light into the 99-7871 radio housing panel using the factory hardware. (Figure A)


- 1 Remove the center bar from the 99-7871 radio housing. (Figure B)
- 2 Attach the corresponding bracket to the DDIN head unit. (Figure C)
- 3 Insert the DDIN trim plate into the radio housing. (Figure D)
- 4 Position the bracket/radio assembly to the back of the radio housing and secure with the (8) Phillips screws provided. (Figure D)

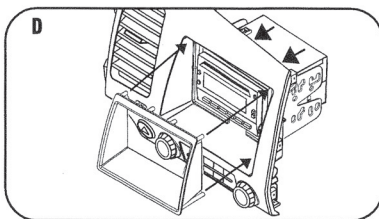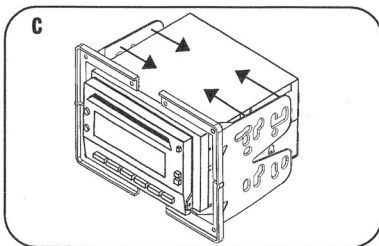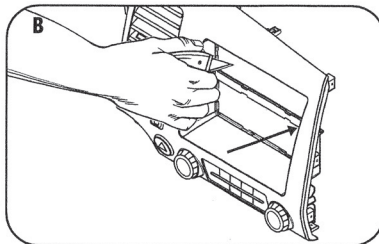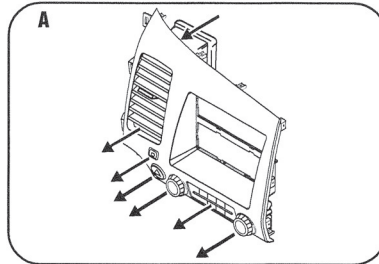

## • Honda Civic Hybrid 2006 ->





Compatible with these Kenwood double DIN devices

### Kenwood Navigation

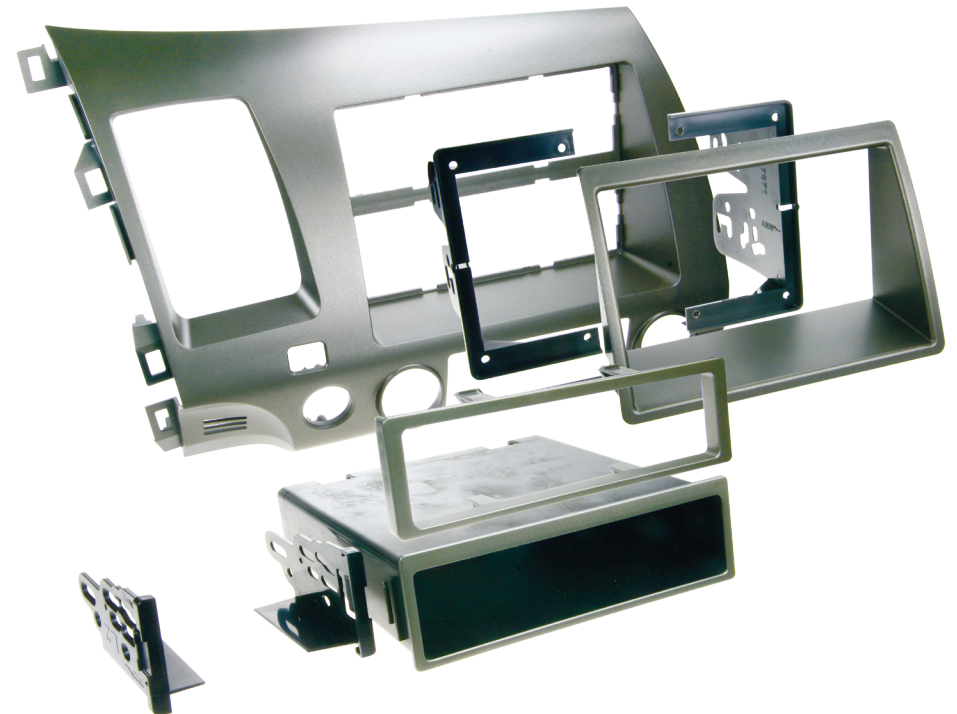

## Installation Manual Double DIN Kit Honda Civic Hybrid 2006->

- 1 Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Unclip and remove the panel below the steering wheel. (Figure A)
- 3 Remove the (1) Phillips screw exposed on the lower left side of the panel above the steering wheel and around the instrument cluster. (Figure B)
- 4 Unclip and remove the panel around top of steering wheel and instrument cluster. (Figure C)
- 5 Remove panel inside pocket below radio and climate controls then remove (2) 8 MM screws facing up behind panel. (Figure D)

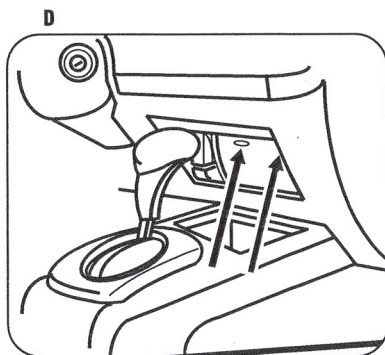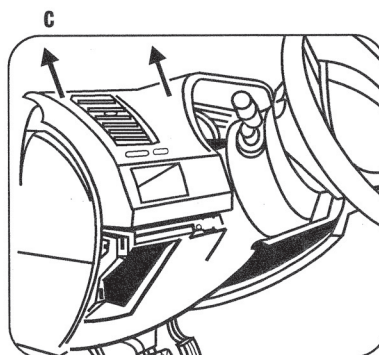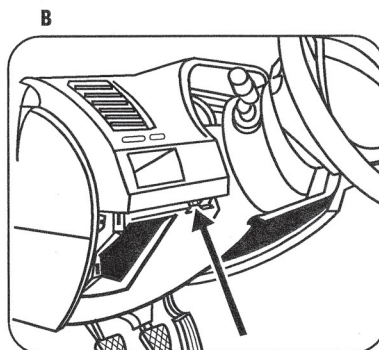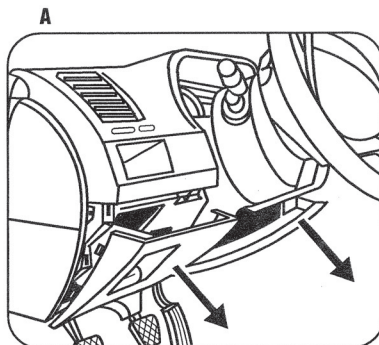

- 6 Unclip and remove radio/climate control assembly. (Figure E)
- 7 Remove (3) Phillips screws securing the a/c vent to the radio/climate control panel. (Figure F)
- 8 Remove the (4) Phillips screws securing the climate control to the radio/climate control panel. (Figure F)
- 9 Remove the (2) Phillips screws securing the hazard switch to the radio/climate control panel. (Figure F)
- 10 Remove the (2) Phillips screws securing the passenger air bag on/off light to the radio/climate control panel. (Figure F)

