


Installation Manual Double DIN Kit 2190-24-RT



7. Place the mounting frame at the dashboard. Fix it with the original screws.

Place the metal frame into the mounting frame.



(sample photo)

8. Connect all required circuit points to the Kenwood head unit and push it into the metal frame until it snaps in.

Place the fascia plate

Reinstall everything in reverse order to finish installation.

KENWOOD


Installation Manual Double DIN Kit

Rubber-Touch:CAW 2190-24-RT

• Mercedes SLK-Class (R171) 2005 →

Compatible with these Kenwood double DIN devices


Kenwood Navigation

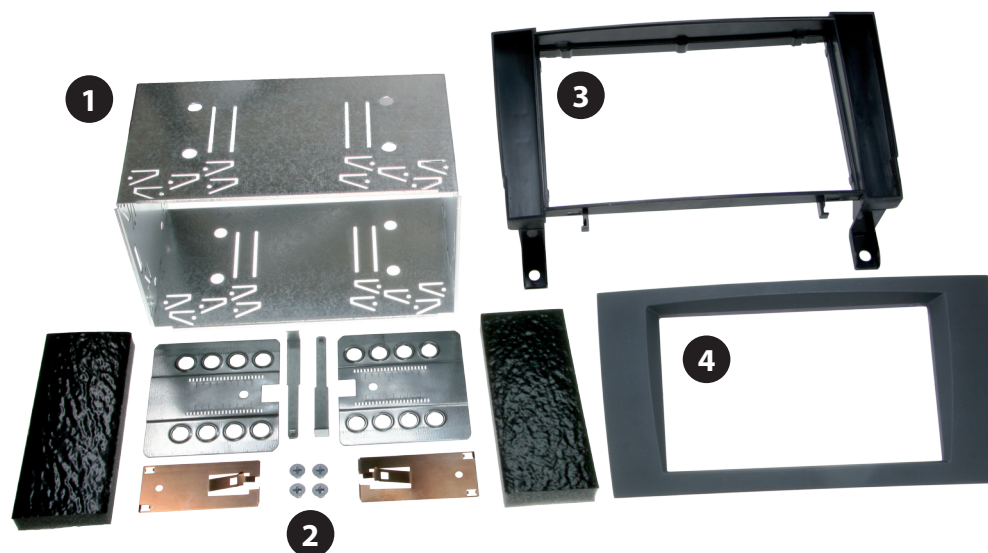


Double DIN Set contents

- (1) Metal Frame
- (2) Installation Kit
- (3) Mounting frame
- (4) Facia Plate

Installation Manual Double DIN Kit 2190-24-RT

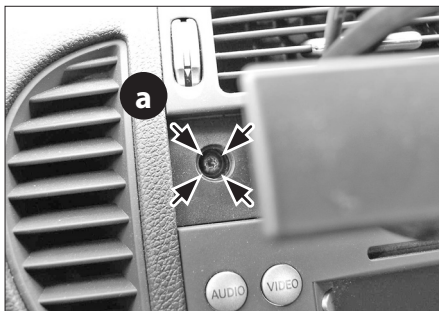

1. Open the cup holder above the OEM head unit. Remove screws (a) and (b). *(The screws are covered with rubber caps)*

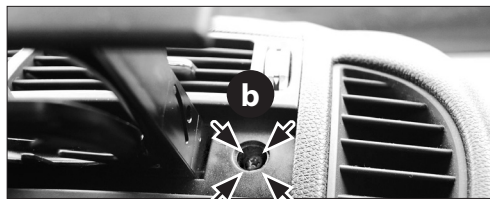



2. Remove the cup holder unit.




3. Open the ash tray. Remove screw (a) on the left. Remove the cover surrounding the cigarette lighter. Remove screw (b) on the right.

Remove the complete ash tray unit.


4. Remove climate control unit

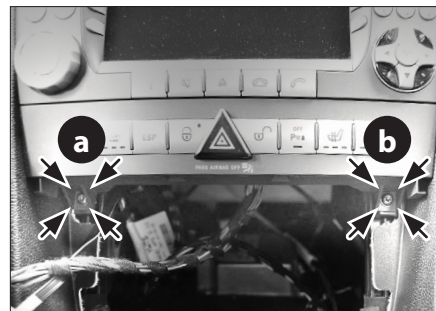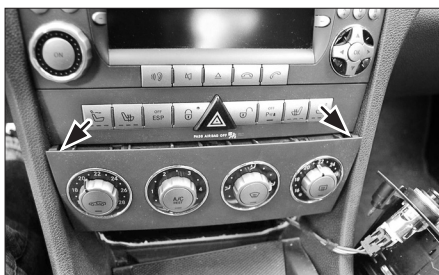


5. Remove screws (a) and (b), then take out switch panel.

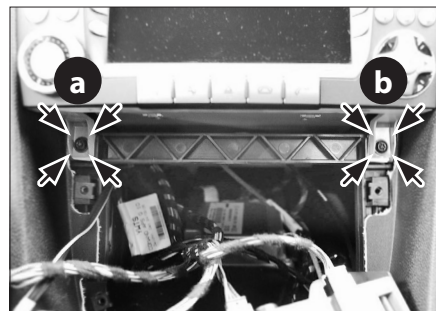

6. Remove screws (a) and (b). Remove OEM head unit.

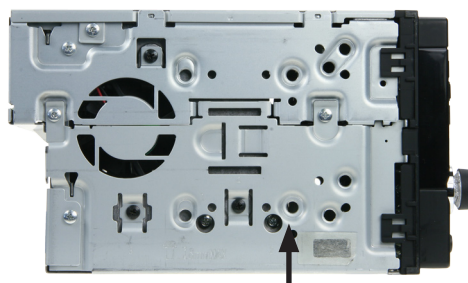

Mount the metal brackets with the double DIN head unit

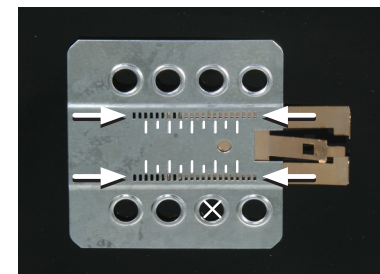

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)

*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*