


• Toyota Auris 2007->

Compatible with these Kenwood double DIN devices

Kenwood Navigation

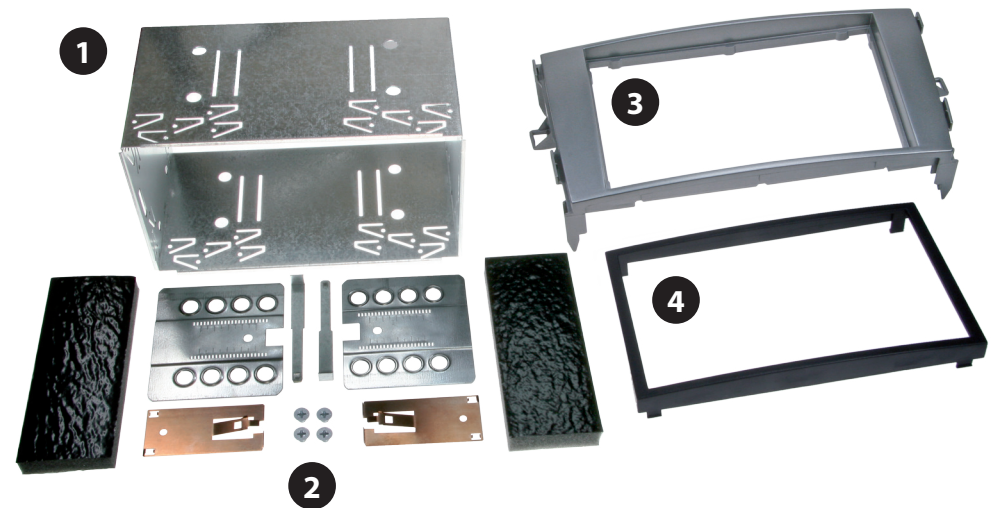


Double DIN Set contents

- (1) Metal Frame
- (2) Installation Kit
- (3) Facia Plate
- (4) Trim Frame

Installation Manual Double DIN Kit CAW 2300-13 / CAW 2300-13-RT



1. Remove the upper part of the silver trim frame

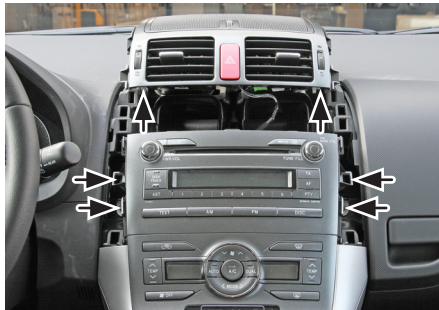


2. Pull up the air vent / hazard switch unit.


Remove 4 screws of the OEM Radio.



3. Remove the OEM head unit.

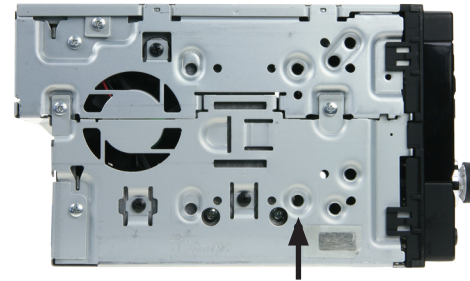

Mount the metal brackets with the double DIN head unit

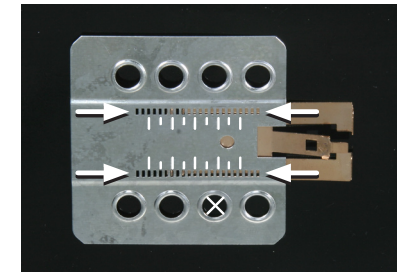

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)



4. Place the facia plate on the dashboard.

Push the Metal Frame into the facia plate.

Connect all required circuit points and push the double DIN head unit in the metal frame until it snaps in.

Place the trim frame.

Reinstall everything in reverse order to finish installation.



*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*