




## Determining the antenna installation location

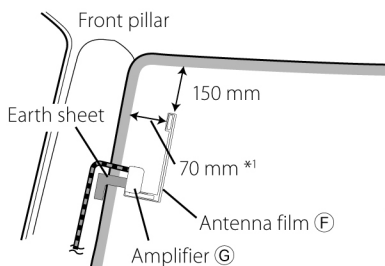


- \*1 Where the earth sheet of the Amplifier (G) can be stuck on the metal part of the front pillar.

## Antenna Installation


- 1 Check the installation location.
- 2 Wipe the area where antenna film (F), amplifier unit (G), and earth sheet is to be placed with the included cleaner (I).
  - The paint work on the metal surface need not be removed
  - Ensure that the glass surface is completely dry before mounting element
  - If the glass is cold to ensure good adhesion warm the glass with the cars windscreen heater
- 3 Remove the backing (tag I) of antenna film (F) horizontally and stick the antenna on the front glass.



- Remove the backing gently
  - Do not touch the sticky side of the antenna film
- 4 Remove the backing (tag II) of antenna film (F) vertically and stick the antenna gently while applying pressure.



- 5 After sticking, rub the element on the windscreen in the direction of the arrow shown in the figure to bond it & remove bubbles.




- 6 Remove the backing film (tag III).
  - Do not touch the feeder terminal of the element. Also, do not apply any glass cleaner.




- 7** Match the contact tabs of the amplifier ⑥ with the ▲ on the antenna film ⑦ and stick.

- Do not touch the feeder terminal or the sticky surface (adhesive side) of the amplifier.



- 8** Remove the film covering the earth sheet and stick the earth sheet on to the metal part of the windscreen pillar.

Provide sufficient leeway for the earth sheet so that it does not interfere with the interior parts (front pillar cover). Also take care that the interior parts do not interfere with the amplifier ⑥.




- 9** Route the antenna cable down the pillar and across the inside of the dash, to the head-unit location

- Use cable ties to secure the antenna cable to the pillar at several locations.

### Notes

Take the following precautions when routing the antenna cable down the front pillar if an air bag is installed.


- Install the Amplifier part of the antenna cable behind or away from an air bag or it's wiring so that it does not interfere with the vehicles safety systems.



The front pillar cover is secured with a special clip which may need to be replaced when the front pillar cover is removed.

Contact your vehicle dealer for details on replacing the front pillar cover and availability of replacement parts.

## 10 Final connection & antenna start-up



Plug DAB Antenna into bottom left hand port as shown above.

### Select the DAB antenna power

Set "INITIAL SET" > "DAB ANT POWER" to "ON" in STANDBY mode.

Push and hold the DAB button to auto tune all available DAB stations

