

KENWOOD

Listen to the Future



KMC-47GPS/48GPS

GPS Speaker Microphones



GENERAL

- Programmable with Radio Software
- Noise Canceling
- 3.5mm Earphone Jack
- Rotary Clip
- Li-ion Memory Backup Battery Cell
- MIL-STD810 C/D/E/F
- MIL-STD "Driven-Rain"
- IP54/55 Water & Dust Intrusion

EVENT-CONTROLLED GPS AUTO-REPORTING

- FleetSync® & NEXEDGE®*1 PTT ID & GPS
- FleetSync® & NEXEDGE®*1 Emergency Activation & GPS
- FleetSync® & NEXEDGE®*1 Status Message Block & GPS
- Programmable Timed Interval Reports

USER-CONTROLLED GPS REPORTING

- Manual GPS Data Send Key

DISPATCH-CONTROLLED GPS REPORTING

- Auto & Manual Request

GENERAL REPORT SETTINGS

- Target Data Zone / Channel / Group ID
- Latitude & Longitude, Altitude
- Number of Times to Send
- UTC Based Data Anti-collision Algorithm

GPS DATA POSITION DISPLAY

- GPS Display On / Off by Key Operation
- Latitude & Longitude Position Display Degrees, Minutes, Seconds Formatting
- Altitude Display Feet or Metres Formatting
- GPS Signal Status Indicator
- Position & Altitude Auto / Manual

COMPATIBILITY

- NX-200/300 Portable Radios*1
- TK-5210/5310/5410 Portable Radios*1
- TK-5220/5320 Portable Radios*1
- TK-2180/3180 Portable Radios*1
- TK-2170/3170 Portable Radios*2*3
- TK-2360/3360 Portable Radios*2*3
- TK-2312/3312 Portable Radios*2
- MPT & LTR® & Conventional Zones
- Kenwood KAS-10 AVL Messaging Software
- Aftermarket FleetSync® & NEXEDGE®*1 AVL Compatible Software

*1: KMC-47GPS only

*2: KMC-48GPS only


*3: Depends on the hardware version



KMC-47GPS



KMC-48GPS

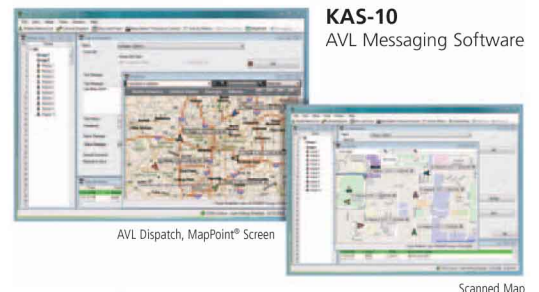

*Availability of radio models may vary depending on region or country.

Specifications

Model	KMC-47GPS	KMC-48GPS
GENERAL		
Operating Temperature	-30° C (-22° F) to +60° C (+140° F)	
Operating Voltage	4 to 10 V DC	
Current Drain	Less than 65mA	
Microphone Sensitivity	-45 dB ±5 dB @ 300 Hz (0 dB = 1 V/Pa)	
Microphone Impedance	2.2 kΩ (max.)	
Speaker Impedance	16 Ω ±15% @ 1.0 V 1.2 kHz	
Speaker Rated Audio Input Power	0.8 W	
Maximum Speaker Input	1.6 W	
Dimensions (W x H x D)	62 x 81 x 36 mm (2.44 x 3.19 x 1.42 in)	
Weight	230 g (8.2 oz.)	
Other Compliances	RoHS compliant lead-free	
Applicable Patents	U.S. Patent 5,884,199	
Applicable Standards	EN 300 440*, EN 301 489 EN60065, EN60215, EN60950-1	
ETSI R&TTE		
ETSI Safety		

GPS SECTION

Receive Method	12 channels parallel
Receive Frequency, Code	1575.42 MHz ± 1 MHz, L1 band, C/A code
Sensitivity	-155 dBm (tracking), -140 dBm (acquisition)
Horizontal Accuracy	Approx. 15 m (GPS: 2 drms, SA=OFF, PDOP ≤ 3)
Data Format	NMEA 0183
Data Update Cycle	1 time per second
Positioning Start Time	
Cold Start	40 seconds (at room temp.)
Warm Start	38 seconds (at room temp.)
Hot Start	8 seconds (at room temp.)

Kenwood follows a policy of continuous advancement in development. For this reason specifications may be changed without notice.

* Receiver Category 3

NEXEDGE® is a registered trademark of Kenwood Corporation.
FleetSync® is a registered trademark of Kenwood Corporation.
LTR® is a registered trademark of Transcript International.

Applicable MIL-STD & IP

Standard	MIL 810C Methods/Procedures	MIL 810D Methods/Procedures	MIL 810E Methods/Procedures	MIL 810F Methods/Procedures
Low Pressure	500.1/Procedure I	500.2/Procedure I, II	500.3/Procedure I, II	500.4/Procedure I, II
High Temperature	501.1/Procedure I, II	501.2/Procedure I, II	501.3/Procedure I, II	501.4/Procedure I, II
Low Temperature	502.1/Procedure I	502.2/Procedure I, II	502.3/Procedure I, II	502.4/Procedure I, II
Temperature Shock	503.1/Procedure I	503.2/Procedure I	503.3/Procedure I	503.4/Procedure I, II
Solar Radiation	505.1/Procedure I	505.2/Procedure I	505.3/Procedure I	505.4/Procedure I
Rain	506.1/Procedure I, II	506.2/Procedure I, II	506.3/Procedure I, II	506.4/Procedure I, III
Humidity	507.1/Procedure I, II	507.2/Procedure II, III	507.3/Procedure II, III	507.4
Salt Fog	509.1/Procedure I	509.2/Procedure I	509.3/Procedure I	509.4
Dust	510.1/Procedure I	510.2/Procedure I	510.3/Procedure I	510.4/Procedure I, III
Vibration	514.2/Procedure VIII, X	514.3/Procedure I	514.4/Procedure I	514.5/Procedure I
Shock	516.2/Procedure I, II, V	516.3/Procedure I, IV	516.4/Procedure I, IV	516.5/Procedure I, IV
International Protection Standard				
Dust & Water Protection	IP54/55			

Listen to the Future

Kenwood has always connected with people through sound. Now we want to expand the world of sound in ways that only Kenwood can, listening to our customers and to the pulse of the coming age as we head toward a future of shared discovery, inspiration and enjoyment.

Kenwood Electronics U.K. Ltd.

Kenwood House, Dwight Road, Watford, Herts, WD18 9EB, United Kingdom

www.kenwood-electronics.co.uk

